

WEIGHT CAPACITY
200 Kg

RADIUS
4500 mm

PRESSURE
0.7-0.8 Mpa

VERTICAL LIFT
1900 mm


VERSIONS
COLUMN
FIXED OVERHEAD
RUNNING OVERHEAD

Pneumatic Manipulator **POSIPLUS PP** with double cable


POSIPLUS PP, is a double cable manipulator with high load capacities, it is able to handle loads up to 200 kg and reaches working radii up to 4500 mm. The gripping tool is connected to the balancing group through two independent steel cables to ensure maximum safety. The particular double-arm structure with intermediate joint makes it easy to operate within the entire working area. Specific brakes mounted on the main joints guarantee control of drift movements.

POSIPLUS[®] - PP

Posiplus column mounted - PPC

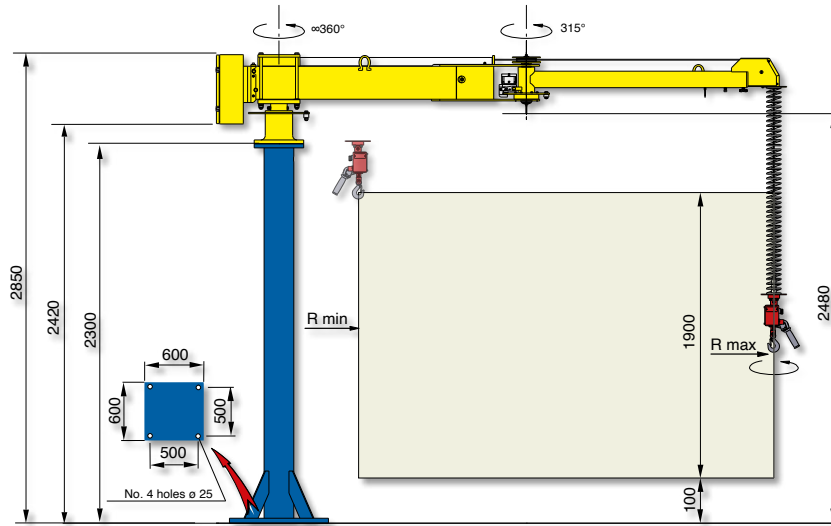


Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned.

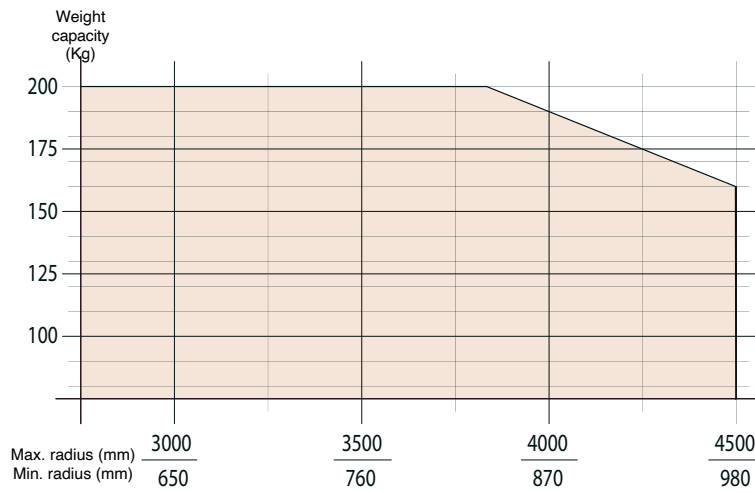


Posiplus

overhead mounted - PPF

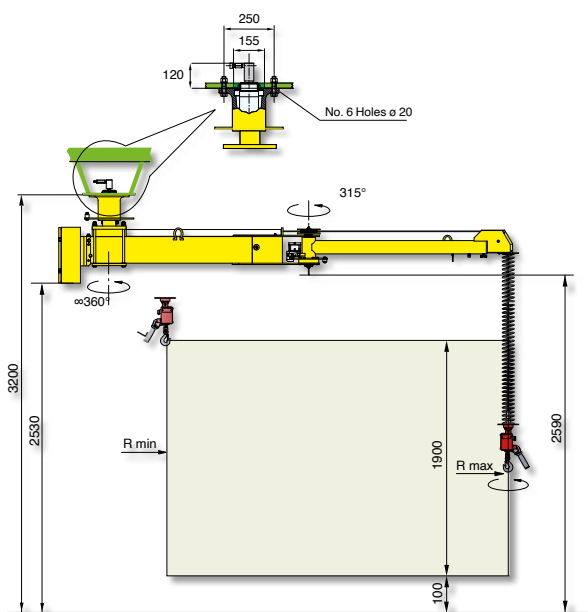

trolley mounted - PPS

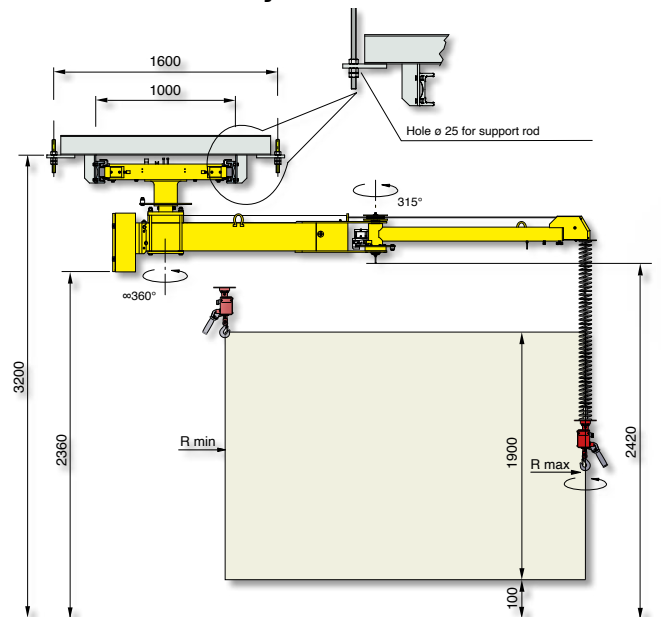

Air supply: dry and oil-free compressed air min. constant 0.7-0.8 MPa